

Parabella

ASSEMBLY INSTRUCTIONS

All Parabella stands comprise a base, 2 curved uprights and a tilting Plasma mount. Optional equipment consists of up to 2 glass shelves and 4-way electrical socket.

Base Unit

1. Attach the 2 curved uprights (A) to the base (B) using the 4 x M12 x 25 Button Head screws provided. (8mm Allen Key).

Fixing Screen to Curved Uprights

Refer to the Plasma Mount instructions enclosed for your particular Plasma Screen.

1. Fix the Back plate (C) of the Plasma Mount (PLW) to the top front face of the 2 curved uprights using the 4 M12 x 25 Button Head screws provided. (8mm Allen Key). There are fixing holes to put the screen at 1.5m or 2m from the floor.

Optional Glass shelves

There are cut-outs in the rear of the curved uprights that the glass shelf (D) mount hooks into.

1. Carefully tilt the glass shelf and mount and place between the curved uprights from the front - bring back to horizontal and locate the lugs on the mount into the cut-outs in the curved uprights.

4-Way Electrical Socket

Fit the 4-Way Electrical socket (E) unit to the back of the Glass shelf mount using the 2 x M6 Socket Cap Head screws provided. (4mm Allen Key).

Fixings:

8 x M12 x 25 Socket Button Head Screws


2 x M6 x 12 Socket Cap Head Screws

1 x 4mm Allen Key

1 x 8mm Allen Key

Shelf - 1 x M6 x 20 Socket Button Head Screw

Unit 1 x M6 Half Nut

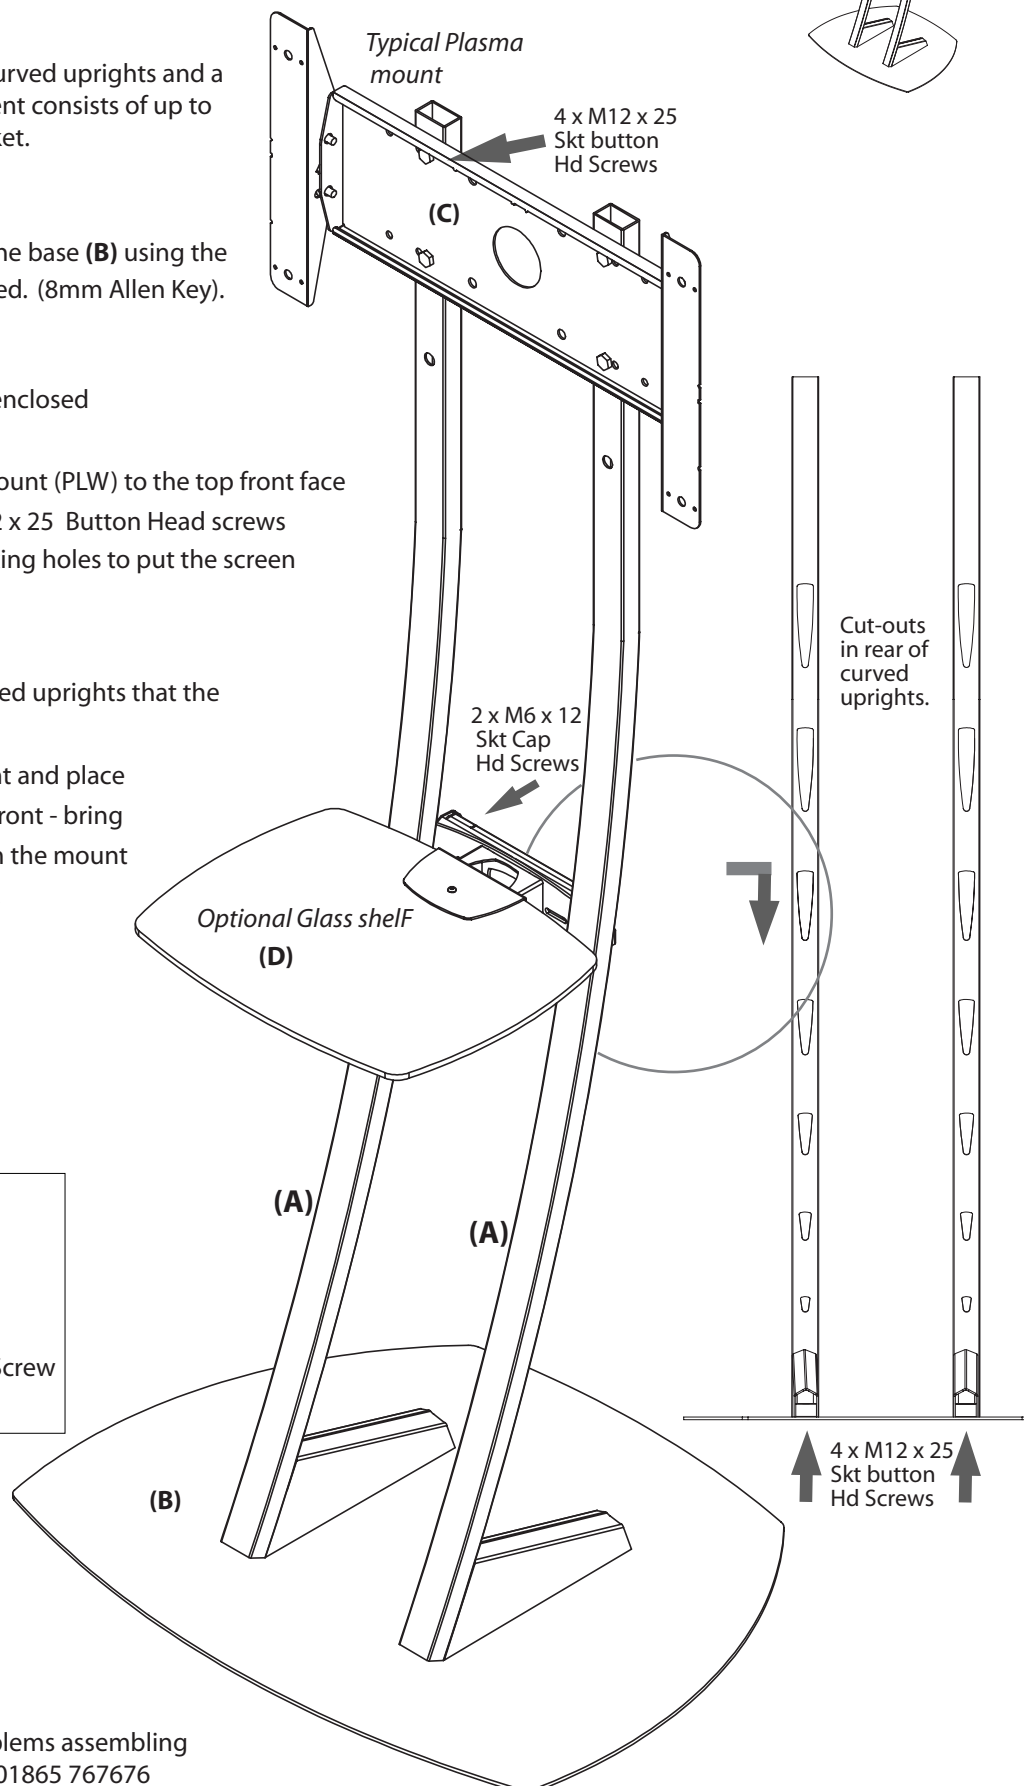

If you have any problems assembling this unit please call 01865 767676

Green Road, Oxford, OX3 8EU email: sales@unicol.com www.unicol.com